

Power Transmission



IRONHORSE®

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motion: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Encoders

Sensors: Limit Switches

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow Switches

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders


Pneumatics: Tubing

Pneumatics: Air Fittings

Appendix Book 2

Terms and Conditions

BOOKMARKS

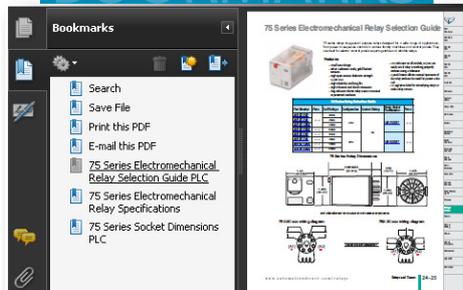

In this interactive PDF you can:

- Use bookmarks to navigate by product category
- Use bookmarks to save, search, print or e-mail the catalog section
- Click on part #s to link directly to our online store for current pricing, specs, stocking information and more

Up-to-date price list:

www.automationdirect.com/pricelist

FREE Technical Support:

www.automationdirect.com/support

FREE Videos:

www.automationdirect.com/videos

FREE Documentation:

www.automationdirect.com/documentation

FREE CAD drawings:

www.automationdirect.com/cad



Cast Iron Worm Gearboxes (Speed Reducers)

- Three output types: Dual Shaft, Right Hand Shaft and Hollow Shaft
- Four frame sizes: 1.75", 2.06", 2.37", 2.62"
- Six ratios: 5:1, 10:1, 15:1, 20:1, 40:1, 60:1
- These gearboxes utilize C-face mounting interfaces for C-face motors
- Worm gear reducer mounting bases are also available for ease of installation



Aluminum Worm Gearboxes (Speed Reducers)


- Five frame sizes: 30, 40, 50, 63, 75 mm
- Gear ratios: 10:1 to 100:1 (in most sizes)
- Input Faces: 56C, 145TC, 182/4TC



IronHorse[®] Worm Gearboxes

AutomationDirect's IronHorse gearboxes are designed for use with C-face electric motors to reduce output speed, increase torque, change drive direction, or run two loads from one motor. Four frame sizes and six gear ratios in right hand and dual shaft output configurations are offered and optional mounting bases are also available for ease of installation.

These units are manufactured in an ISO9001 certified plant by one of the leading worm gearbox manufacturers in the world today. Strict adherence to and compliance with the toughest international and U.S. testing standards and manufacturing procedures assure you the highest quality mechanical power transmission products.

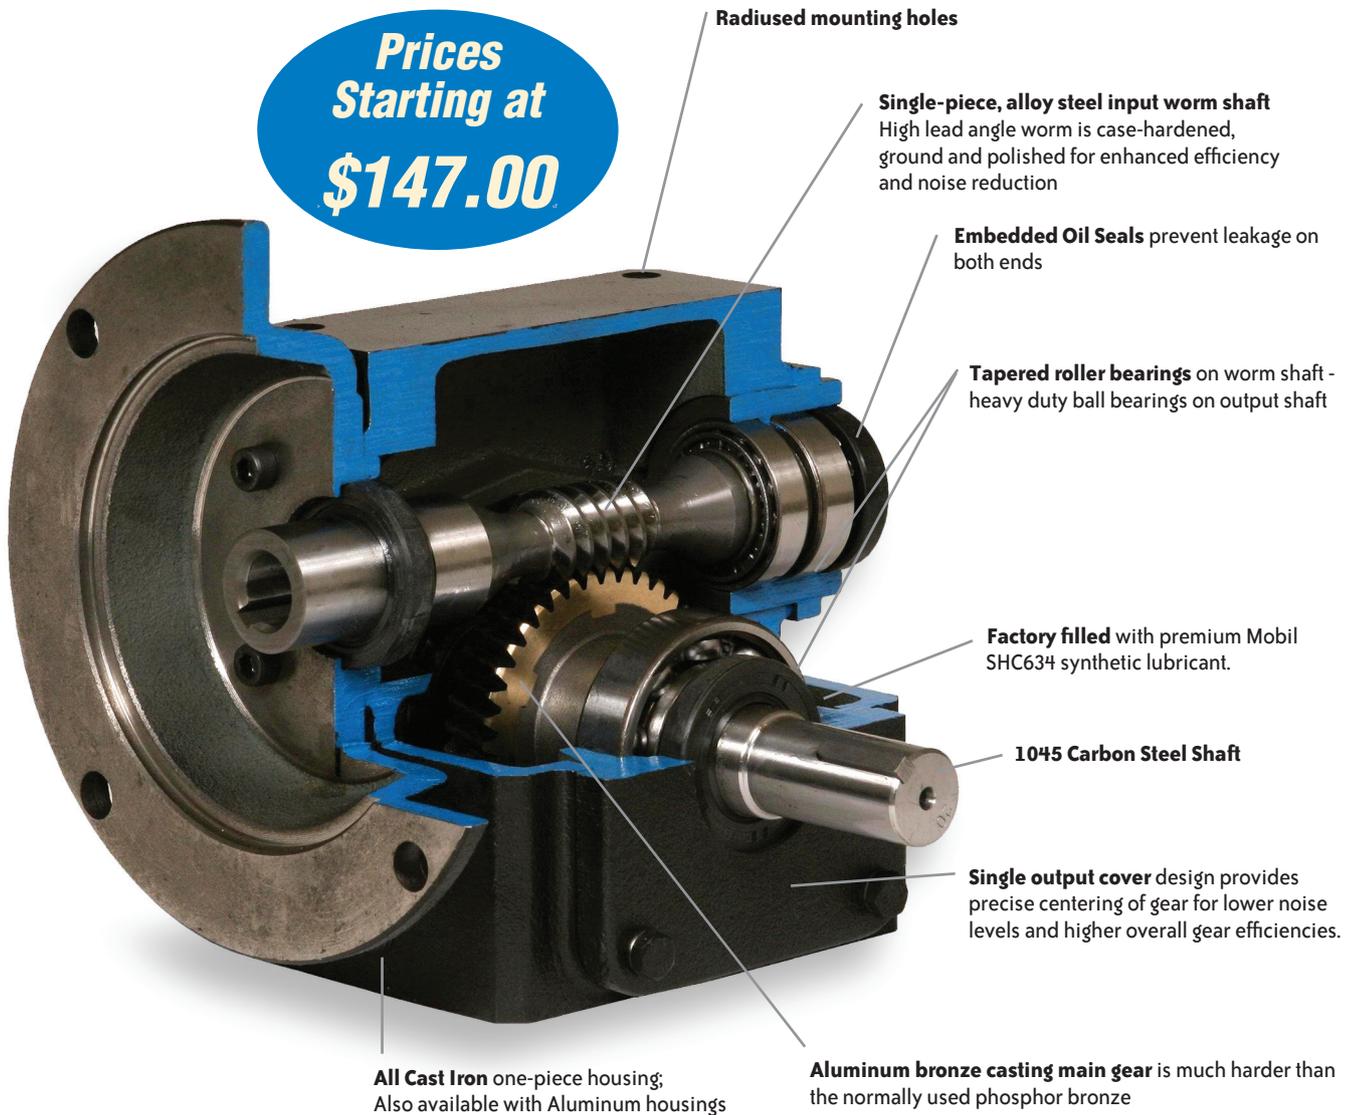

Compatible with our Ironhorse Motors

The worm gearboxes were selected to match up with our IronHorse motors. Most gearbox models are equipped with NEMA 56C motor inputs. Our complete line of MTR general purpose motors and many of our inverter duty Marathon motors will easily bolt to these boxes. Please see the complete technical specifications to choose the correct gearbox for your application.



IronHorse[®] Cast-Iron Worm Gearboxes

Cast-Iron Model Overview



IronHorse Cast-Iron Right-Hand Shaft Worm Gearbox



IronHorse Cast-Iron Dual Shaft Worm Gearbox



IronHorse Cast-Iron Hollow Bore Worm Gearbox

Gearbox Overview

Gearboxes, also known as enclosed gear drives or speed reducers, are mechanical drive components that can control a load at a reduced fixed ratio of the motor speed. The output torque is also increased by the same ratio, while the horsepower remains the same (less efficiency losses.) For example, a 10:1 ratio gearbox outputs approximately the same motor output horsepower, motor speed divided by 10, and motor torque multiplied by 10.


Worm gearboxes contain a worm (gear type) on the input shaft, and a mating gear on the output shaft. Worm gearboxes also change the drive direction by 90°.

IronHorse worm gearboxes are manufactured in an ISO9001 certified plant by one of the leading gearbox manufacturers in the world today. Only the highest quality materials are tested, certified, and used in the manufacturing process. Strict adherence to and compliance with the toughest international and U.S. testing standards and manufacturing procedures assure you the highest quality products.

We offer right-angle worm gearboxes with aluminum frames and with cast-iron frames. The output shafts are perpendicular to the inputs, and change the drive direction(s) by 90°. Our gearboxes utilize C-face mounting interfaces for C-face motors.

Our cast-iron gearboxes are offered with right-hand and dual (both right and left) output shafts, and with hollow-bore outputs (all the way through from one side to the other). We also offer optional gearbox mounting bases for ease of installation of these cast-iron gearboxes.

We also offer mounting bases for ease of installation.

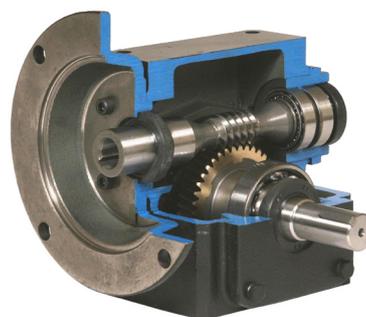

IronHorse Worm Gearbox Cutaway View

Features

- C flange input; dual shaft, right-hand shaft, or hollow-bore output
- Cast iron one-piece housing
- 1045 carbon steel shaft
- AIBC3 (aluminum bronze casting) main gear; much harder than typically used phosphor bronze
- Shaft sleeves protect all shafts
- One-piece output shaft hub secures output shaft bearing
- Double bearing sets on both shaft ends
- Heavy duty bearings on the output shaft
- Interior channel guides oil to directly and constantly lube bearings
- All units filled with Mobil SHC634 synthetic oil
- Double-lipped embedded oil seals to prevent leakage
- Special anti-rust primer inside and outside the gearbox
- Special black natural dry paint
- Universally interchangeable compact design ensures easy OEM replacement
- Mountable in any direction, except motor pointing up
- Radiused mounting holes
- Optional mounting plates available
- One year warranty

Applications

- Use with electric motors for reducing output speed, increasing torque, changing drive direction, or running two loads from one motor.
- Use for conveyors, packaging machines, rotary tables, etc.

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motor: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Encoders

Sensors: Limit Switches

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow Switches

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders

Pneumatics: Tubing

Pneumatics: Air Fittings

Appendix Book 2

Terms and Conditions

IronHorse® Cast-Iron Worm Gearboxes

Specifications

IronHorse Cast-Iron Worm Gearboxes																																						
Part Number	Price	Ratio	Output RPM @ 1750 RPM Input	Nominal Motor HP ¹ @1800 rpm	NEMA Motor Frame	Output Type ²	Center Distance ³ (in)	Overhung Load ⁴ (lb)	Thrust Load ⁵ (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 RPM Input						Maximum Input Speed (rpm)																				
												Mechanical ⁶			Thermal ⁷																							
												Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	Input Power (hp)	Output Power (hp)	Output Torque (lb-in)																					
WG-175-005-D	\$147.00	5:1	350	1-1/2	56C	D	1.75	650	550	93	23	2.83	2.62	499	2.28	2.11	402	2500																				
WG-175-005-H	\$193.00					H					23																											
WG-175-005-R	\$147.00					R					22																											
WG-175-010-D	\$147.00	10:1	175	1	56C	D				1.75	650	550	88	23	1.57	1.38	515		1.36	1.19	445	2500																
WG-175-010-H	\$193.00					H								23																								
WG-175-010-R	\$147.00					R								22																								
WG-175-015-D	\$147.00	15:1	117	3/4	56C	D							1.75	650	550	85	23		1.24	1.06	554		1.13	0.96	506	2500												
WG-175-015-H	\$193.00					H											23																					
WG-175-015-R	\$147.00					R											22																					
WG-175-020-D	\$147.00	20:1	88	3/4	56C	D										1.75	650		550	83	23		1.26	1.04	737		0.98	0.81	572	2500								
WG-175-020-H	\$193.00					H															23																	
WG-175-020-R	\$147.00					R															22																	
WG-175-040-D	\$147.00	40:1	44	1/3	56C	D														1.75	650		550	62	23		0.79	0.49	714		0.45	0.28	404	2500				
WG-175-040-H	\$193.00					H																			23													
WG-175-040-R	\$147.00					R																			22													
WG-175-060-D	\$147.00	60:1	29	1/4	56C	D																		1.75	650		550	52	23		0.38	0.20	433		0.35	0.19	404	2500
WG-175-060-H	\$193.00					H																							23									
WG-175-060-R	\$147.00					R																							22									
WG-206-005-D	\$186.00	5:1	350	2	56C	D	2.06	700	750									92										28	3.62		3.33	925	2.57		2.36	657	2500	
WG-206-005-H	\$232.00					H																						28										
WG-206-005-R	\$186.00					R																						27										
WG-206-010-D	\$186.00	10:1	175	1-1/2	56C	D				2.06	700	750						90				28						2.77	2.50		935	2.10	1.89		708	2500		
WG-206-010-H	\$232.00					H																28																
WG-206-010-R	\$186.00					R																27																
WG-206-015-D	\$186.00	15:1	117	1	56C	D							2.06	700	750			85				28				2.09		1.78	1002		1.40	1.20	673		2500			
WG-206-015-H	\$232.00					H																28																
WG-206-015-R	\$186.00					R																27																
WG-206-020-D	\$186.00	20:1	88	1	56C	D										2.06	700	750	82			28				1.57		1.29	914	1.17	0.96	681	2500					
WG-206-020-H	\$232.00					H																28																
WG-206-020-R	\$186.00					R																27																
WG-206-040-D	\$188.00	40:1	44	1/2	56C	D													2.06	700	750	71	28			1.09		0.77	1120	0.71	0.50	726		2500				
WG-206-040-H	\$232.00					H																	28															
WG-206-040-R	\$186.00					R																	27															
WG-206-060-D	\$186.00	60:1	29	1/3	56C	D																2.06	700	750	58	28	0.60	0.35	750	0.48	0.28	606						2500
WG-206-060-H	\$232.00					H																				28												
WG-206-060-R	\$186.00					R																				27												

This table continued next page.

IronHorse[®] Cast-Iron Worm Gearboxes

Specifications (continued)

IronHorse Cast-Iron Worm Gearboxes (continued)																					
Part Number	Price	Ratio	Output RPM @ 1750 RPM Input	Nominal Motor HP ¹ @1800 rpm	NEMA Motor Frame	Output Type ²	Center Distance ³ (in)	Overhung Load ⁴ (lb)	Thrust Load ⁵ (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 RPM Input						Maximum Input Speed (rpm)			
												Mechanical ⁶			Thermal ⁷						
												Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	Input Power (hp)	Output Power (hp)	Output Torque (lb-in)				
WG-237-005-D	\$224.00	5:1	350	3	56C	D	2.37	900	900	93	38	4.32	4.02	766	3.56	3.31	630	2500			
WG-237-005-H	\$265.00					H					36										
WG-237-005-R	\$224.00					R					37										
WG-237-010-D	\$224.00	10:1	175	1-1/2		D				2.37	900	900	89	38	3.47	3.09	1158		2.24	1.99	746
WG-237-010-H	\$265.00					H								36							
WG-237-010-R	\$224.00					R								37							
WG-237-015-D	\$224.00	15:1	117	1		D				2.37	900	900	84	38	2.64	2.22	1249		1.55	1.30	732
WG-237-015-H	\$265.00					H								36							
WG-237-015-R	\$224.00					R								37							
WG-237-020-D	\$224.00	20:1	88	1		D				2.37	900	900	82	38	2.06	1.69	1195		1.36	1.12	791
WG-237-020-H	\$265.00					H								36							
WG-237-020-R	\$224.00					R								37							
WG-237-040-D	\$224.00	40:1	44	1/2		D				2.37	900	900	71	38	1.45	1.02	1483		0.83	0.58	845
WG-237-040-H	\$265.00					H								36							
WG-237-040-R	\$224.00					R								37							
WG-237-060-D	\$224.00	60:1	29	1/2	D	2.37	900	900	61	38	0.86	0.53	1149	0.63	0.39	844					
WG-237-060-H	\$265.00				H					36											
WG-237-060-R	\$224.00				R					37											
WG-262-005-D	\$241.00	5:1	350	3	182TC	D	2.62	1000	1000	93	57	5.24	4.86	924	4.32	4.00	761				
WG-262-005-H	\$326.00					H					58										
WG-262-005-R	\$241.00					R					56										
WG-262-010-D	\$241.00	10:1	175	2		D				2.62	1000	1000	90	57	4.17	3.74	1445	3.06	2.75	1061	
WG-262-010-H	\$326.00					H								57							
WG-262-010-R	\$241.00					R								56							
WG-262-015-D	\$241.00	15:1	117	2		D				2.62	1000	1000	87	50	3.22	2.81	1577	2.47	2.16	1212	
WG-262-015-H	\$326.00					H								50							
WG-262-015-R	\$241.00					R								49							
WG-262-020-D	\$241.00	20:1	88	1-1/2		D				2.62	1000	1000	83	50	2.67	2.21	1563	1.84	1.53	1078	
WG-262-020-H	\$326.00					H								50							
WG-262-020-R	\$241.00					R								49							
WG-262-040-D	\$241.00	40:1	44	3/4		56C				D	2.62	1000	1000	72	50	1.85	1.32	1919	1.11	0.80	1153
WG-262-040-H	\$326.00									H					50						
WG-262-040-R	\$241.00									R					49						
WG-262-060-D	\$241.00	60:1	29	3/4	D		2.62	1000	1000	66				50	1.16	0.77	1670	0.94	0.62	1346	
WG-262-060-H	\$326.00				H									51							
WG-262-060-R	\$241.00				R									49							

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.

2) Output Type: D = Dual Shaft; H = Hollow Bore; R = Right-Hand Shaft

3) The Center Distance is the distance between the centerlines of the input and output shafts.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.

5) Thrust Load ratings are for forces along the axis of the output shaft, usually encountered in vertical-drive applications from agitators, mixers, fans, blowers, etc.

6) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the "Service Factors" table for more information.

7) Maximum Thermal Ratings are limits for gearbox continuous use without overheating.

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motion: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Encoders

Sensors: Limit Switches

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow Switches

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders

Pneumatics: Tubing

Pneumatics: Air Fittings

Appendix Book 2

Terms and Conditions

IronHorse® Cast-Iron Worm Gearboxes

Gearbox Selection Factors

Chain & Sprocket	1.00
Gear	1.25
V-belt	1.50
Flat Belt	2.50
Variable Pitch Belt	3.50


Divide gearbox OHL ratings by the applicable OHL K factors.

Service Continuity (per day)	Load Characteristics			
	Uniform	Moderate Shock*	Heavy Shock*	Extreme Shock*
Occasional 1/2 hour	1.00	1.00	1.00	1.25
Less than 3 hours	1.00	1.00	1.25	1.50
3-10 hours	1.00	1.25	1.50	1.75
More than 10 hours	1.25	1.50	1.75	2.00

* Shock results from sudden increases in the torque demand of the load, such as: sudden stopping, restarting, and/or reversing; significantly heavy loads dropped onto a moving conveyor; impact loads such as punch press operations.

Depending upon the load characteristics, divide the gearbox HP, Overhung Load, and Maximum Mechanical Capacity ratings by the applicable service factor.

Gearbox Dimensions – Cast-Iron Solid-Shaft Output Gearboxes

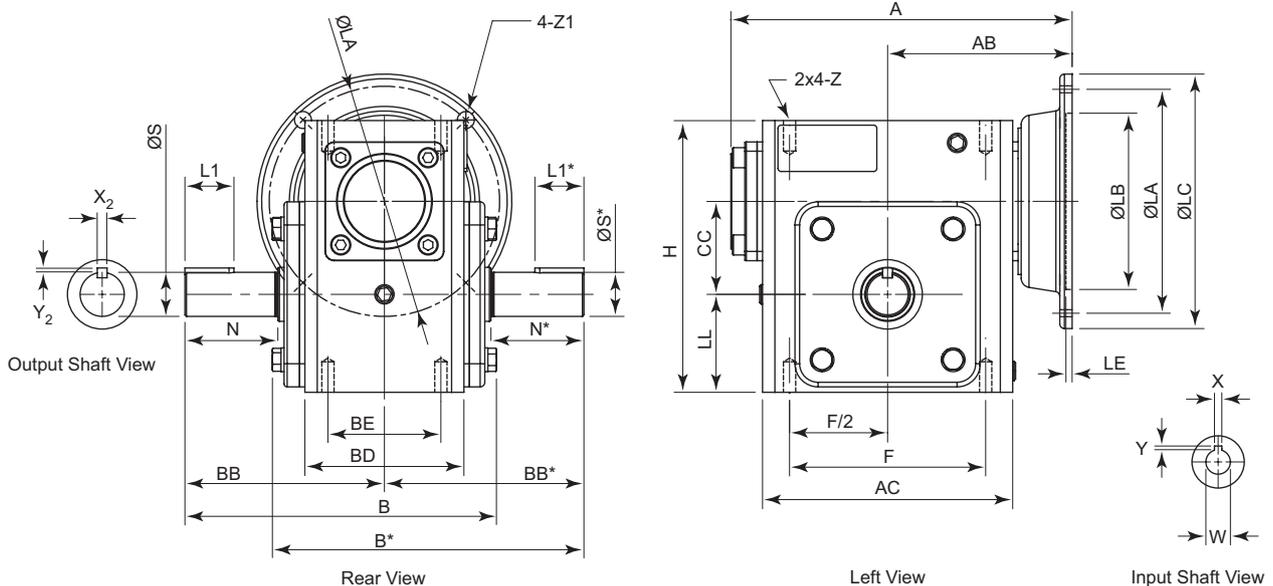


* Left side output shafts are present only on dual-shaft models (WG-xxx-xxx-D)

Dimensions (inches) – IronHorse Cast-Iron Worm Gearboxes – Solid-Shaft Outputs																																																				
Part Number	Frame	A	AB	AC	B	BB	BD	BE	CC	F	H	LL	Z (UNC)	Flange				Input Shaft			Output Shaft																															
														LA	LB	LC	LE	Z1	W	X	Y	L1	N	S	X ₂	Y ₂																										
WG-175-xxx-D/R	56C	7.29	4.035	5.06	6.83	4.311	3.56	2.75	1.75	4.188	5.75	2.062	3/8-16	5.875	4.5	6.496	0.157	0.433	5/8	3/16	3/32	1	1.781	7/8	3/16	3/32																										
WG-206-xxx-D/R		7.95	4.37	5.75	7.25	4.69	3.82	2.88	2.062	5	6.38	2.281										1.25	2.09	1																												
WG-237-xxx-D/R		8.71	4.705	6.38	7.95	5.087	4.06	2.88	2.375	5	6.94	2.5										1.25	2.37																													
WG-262-005-D/R	182 TC	10.57	6.24																																																	
WG-262-010-D/R																																																				
WG-262-015-D/R	56C	9.41	5.059	7.17	8.87	5.63	4.69	3.375	2.625	6.375	8	2.938																																								
WG-262-020-D/R																																																				
WG-262-040-D/R																																																				
WG-262-060-D/R																																																				

Dual-shaft output gearboxes have B, BB, L1, N, S, X₂, & Y₂ dimensions on both sides.
 Right-hand shaft gearboxes have output shafts only on the right side, as viewed looking into the input shaft (dimensions B, BB, L1, N, S, X₂, & Y₂).
 See our website: www.AutomationDirect.com for complete engineering drawings.

IronHorse[®] Cast-Iron Worm Gearboxes

Gearbox Dimensions – Cast-Iron Hollow-Bore Output Gearboxes

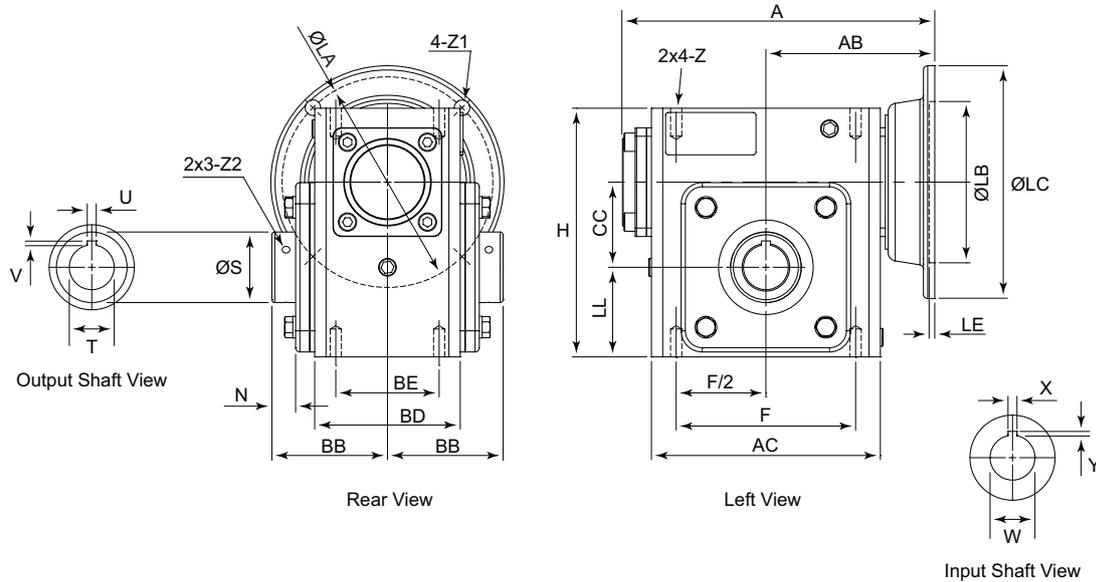

Dimensions (inches) – IronHorse Cast-Iron Worm Gearboxes – Hollow-Bore Outputs															
Part Number	Frame	A	AB	AC	BB	BD	BE	CC	F	H	LL	Z (UNC)			
WG-175-xxx-H	56C	7.28	4.035	5.059	3.091	3.563	2.750	1.75	4.188	5.75	2.062	3/8-16			
WG-206-xxx-H		7.95	4.370	5.748	3.219	3.819	2.880	2.062	5.000	6.375	2.281				
WG-237-xxx-H		8.68	4.705	6.378	3.220	4.055	2.880	2.375	5.000	6.937	2.500				
WG-262-005-H	182 TC	10.59	6.240	7.165	3.500	4.685	3.375	2.625	6.375	8.000	2.938				
WG-262-010-H															
WG-262-015-H	56C	9.41	5.059	7.165	3.500	4.685	3.375	2.625	6.375	8.000	2.938				
WG-262-020-H															
WG-262-040-H															
WG-262-060-H															
Part Number (repeated)	Frame	Flange				Input Shaft			Output Bore						
		LA	LB	LC	LE	Z1	W	X	Y	N	S	T	U	V	Z2 (UNF)
WG-175-xxx-H	56C	5.875	4.5	6.496	0.157	0.433	0.625	3/16	3/32	0.787	1.575	1.0	1/4	7/64	#10-32
WG-206-xxx-H										0.797	1.772	1.125		1/8	
WG-237-xxx-H										0.661	1.969	1.250		7/64	
WG-262-005-H	182 TC	7.25	8.5	9.000	0.197	0.551	1.125	1/4	1/8	0.626	2.362	1.437	3/8	5/32	1/4-28
WG-262-010-H															
WG-262-015-H	56C	5.875	4.5	6.496	0.157	0.433	0.625	3/16	3/32	0.626	2.362	1.437	3/8	5/32	
WG-262-020-H															
WG-262-040-H															
WG-262-060-H															

See our website: www.AutomationDirect.com for complete engineering drawings.

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motion: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Encoders

Sensors: Limit Switches

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow Switches

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders

Pneumatics: Tubing

Pneumatics: Air Fittings

Appendix Book 2


Terms and Conditions

IronHorse[®] Cast-Iron Worm Gearboxes

Accessories – Mounting Base



IronHorse Worm Gearbox Mounting Base

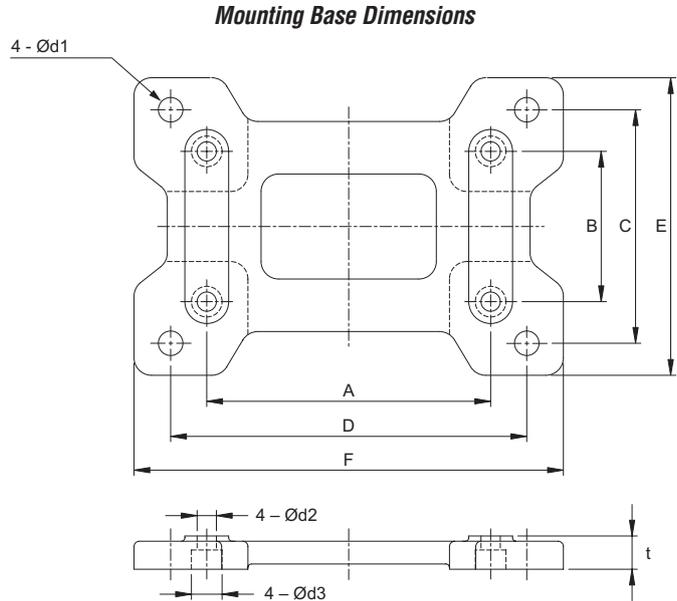

IronHorse Cast-Iron Worm Gearbox Mounting Bases													
Part Number	Price	Fits Gearbox Numbers	Approx Weight (lb)	Dimensions (in)									
				A	B	C	D	E	F	t	d1	d2	d3
WG-175-BASE	\$15.00	WG-175-xxx-x	4.0	4.19	2.76	4.50	5.75	5.69	7.00	0.69	0.43	0.35	0.55
WG-206-BASE	\$18.00	WG-206-xxx-x	4.8	5.00	2.88	4.69	6.38	5.91	7.76	0.72	0.47	0.43	0.69
WG-237-BASE	\$21.50	WG-237-xxx-x	6.2	5.00	2.88	4.88	7.06	6.22	8.50	0.75	0.47	0.43	0.69
WG-262-BASE	\$24.50	WG-262-xxx-x	7.5	6.38	3.38	5.25	8.00	6.69	9.65	0.75	0.55	0.43	0.69

See our website: www.AutomationDirect.com for complete engineering drawings.

Cast-Iron Worm Gearbox Cross Reference

IronHorse Cast-Iron Worm Cross Reference *				
AutomationDirect IronHorse™	WG-175-xxx-x	WG-206-xxx-x	WG-237-xxx-x	WG-262-xxx-x
Alling Lander	17UF	20UF	23UF	26UF
Baldor	F918	F921	F924	F926
Boston	F718	F721	F724	F726
Browning-Raider	Q175	Q206	Q237	Q262
Dodge-Tigear	Q175	Q200	-	Q262
Falk-Omnibox	1175WBM	1206WBM	1238WBM	1262WBM
Grove (new)	BMQ218	BMQ220	BMQ224	BMQ226
Grove (old)	BMQ1175	BMQ1206	BWQ1238	BMQ1262
Leeson	BMQ618	BMQ621	BMQ624	BMQ626
Morse Invader	718F	721F	724F	726F
Ohio Gear	BMQ2175	BMQ2206	BMQ2238	BMQ2262

* IronHorse Series Gear Drives are designed to be functionally interchangeable with these and many other manufacturer's drives. This chart is intended to be a guide only. Customers should compare the appropriate manufacturer's specifications for exact details regarding ratings and dimensions.

IronHorse[®] Aluminum Worm Gearboxes

Aluminum Model Overview



**IronHorse Aluminum Hollow Bore
Worm Gearbox**



**IronHorse Aluminum Worm Gearbox
Accessories**

Gearbox Overview

Gearboxes, also known as enclosed gear drives or speed reducers, are mechanical drive components that can control a load at a reduced fixed ratio of the motor speed. The output torque is also increased by the same ratio, while the horsepower remains the same (less efficiency losses.) For example, a 10:1 ratio gearbox outputs approximately the same motor output horsepower, motor speed divided by 10, and motor torque multiplied by 10.

Worm gearboxes contain a worm (gear type) on the input shaft, and a mating gear on the output shaft. Worm gearboxes also change the drive direction by 90°.

IronHorse worm gearboxes are manufactured in an ISO9001 certified plant by one of the leading gearbox manufacturers in the world today. Only the highest quality materials are tested, certified, and used in the manufacturing process. Strict adherence to and compliance with the toughest international and U.S. testing standards and manufacturing procedures assure you the highest quality products.

We offer right-angle worm gearboxes with aluminum frames and with cast-iron frames. The output shafts/bores are perpendicular to the inputs, and change the drive direction(s) by 90°. Our gearboxes utilize C-face mounting interfaces for C-face motors.

Aluminum gearboxes feature hollow-bore outputs (all the way through from one side to the other). We also offer optional single and double output shafts, output flanges, torque arms, and output covers.

Features

- 10:1 to 100:1 ratios
- Box sizes 30 to 75 mm
- Aluminum alloy housing for lightweight design
- Hardened worm shaft for increased durability
- Two bearings on input and output shafts
- NEMA motor input flanges
- All units filled with Mobil SHC634 synthetic oil
- No vent plug or breather needed; maintenance-free reducer
- Double lip oil seals prevent leakage
- Multiple mounting holes for all angle mounts
- Epoxy paint applied to inside and outside of reducer to protect against corrosion
- Hollow output bores with available plug-in output shafts
- Mountable in any direction, except motor pointing up

Applications

- Use with electric motors for reducing output speed, increasing torque, changing drive direction, or running two loads from one motor.
- Use for conveyors, packaging machines, rotary tables, etc.

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motion: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Encoders

Sensors: Limit Switches

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow Switches

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders

Pneumatics: Tubing

Pneumatics: Air Fittings

Appendix Book 2

Terms and Conditions

IronHorse[®] Aluminum Worm Gearboxes

Specifications

IronHorse Aluminum Worm Gearboxes – 30, 40, 50, & 63 mm Frames															
Part Number	Price	Ratio	Output RPM @ 1750 RPM Input	Nominal Motor HP ¹ @1800 rpm	NEMA Motor Frame	Output Type ²	Center Distance ³ (mm)	Overhung Load ⁴ (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 RPM Input			Maximum Input Speed (rpm)	
											Mechanical ⁵				
											Input Power (hp)	Output Power (hp)	Output Torque (lb-in)		
WGA-30M-010-H1	\$88.00	10:1	175	0.5	56C	H	30	142	80	3	0.54	0.43	150	2,000	
WGA-30M-020-H1	\$88.00	20:1	88	0.25							0.30	0.22	150		
WGA-30M-030-H1	\$88.00	30:1	58	0.25							0.25	0.16	177		
WGA-30M-040-H1	\$88.00	40:1	44	0.2							0.19	0.10	150		
WGA-30M-060-H1	\$88.00	60:1	29	0.12							0.12	0.06	142		
WGA-40M-010-H1	\$109.00	10:1	175	1							56C	H	40		279
WGA-40M-020-H1	\$109.00	20:1	88	0.5		0.61	0.48	345							
WGA-40M-030-H1	\$109.00	30:1	58	0.5		0.53	0.36	389							
WGA-40M-040-H1	\$109.00	40:1	44	0.33		0.39	0.25	363							
WGA-40M-060-H1	\$109.00	60:1	29	0.25		0.25	0.14	319							
WGA-40M-080-H1	\$109.00	80:1	22	0.12		0.19	0.10	283							
WGA-40M-100-H1	\$109.00	100:1	17.5	0.12		0.15	0.07	257							
WGA-50M-010-H1	\$150.00	10:1	175	2	56C	H	50	406	84	8		2.06	1.73	628	
WGA-50M-020-H1	\$150.00	20:1	88	1								1.13	0.88	646	
WGA-50M-030-H1	\$150.00	30:1	58	0.75								0.95	0.67	734	
WGA-50M-040-H1	\$150.00	40:1	44	0.75								0.70	0.46	664	
WGA-50M-060-H1	\$150.00	60:1	29	0.33								0.46	0.26	602	
WGA-50M-080-H1	\$150.00	80:1	22	0.33							0.38	0.19	566		
WGA-50M-100-H1	\$150.00	100:1	17.5	0.25		0.28	0.13	487							
WGA-63M-010-H1	\$194.00	10:1	175	3		56C	H	63	510	86	13	3.67	3.16	1141	
WGA-63M-010-H2	\$194.00	10:1	175	3								145TC	3.67	3.16	1141
WGA-63M-020-H1	\$194.00	20:1	88	2								56C	2.04	1.63	1186
WGA-63M-020-H2	\$194.00	20:1	88	2								145TC	2.04	1.63	1186
WGA-63M-030-H1	\$194.00	30:1	58	1.5								736	73	1.76	1.28
WGA-63M-040-H1	\$194.00	40:1	44	1	807							70	1.26	0.88	1274
WGA-63M-060-H1	\$194.00	60:1	29	0.75	928		59	0.86	0.51	1141					
WGA-63M-080-H1	\$194.00	80:1	22	0.5	1017		53	0.67	0.36	1071					
WGA-63M-100-H1	\$194.00	100:1	18	0.5	1088		48	0.57	0.27	1035					

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.

2) Output Type: H = Hollow Bore.

3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.

5) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the "Service Factors" table for more information.

IronHorse[®] Aluminum Worm Gearboxes

Specifications (continued)

IronHorse Aluminum Worm Gearboxes – 75 mm Frames																
Part Number	Price	Ratio	Output RPM @ 1750 RPM Input	Nominal Motor HP ¹ @1800 rpm	NEMA Motor Frame	Output Type ²	Center Distance ³ (mm)	Overhung Load ⁴ (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 RPM Input			Maximum Input Speed (rpm)		
											Mechanical ⁵					
											Input Power (hp)	Output Power (hp)	Output Torque (lb-in)			
WGA-75M-010-H1	\$281.00	10:1	175	5	56C	H	75	604	86	19	5.44	4.68	1717	2,000		
WGA-75M-010-H2	\$281.00	10:1	175	5	145TC						604	86	5.44		4.68	1717
WGA-75M-010-H3	\$281.00	10:1	175	5	182/4TC						604	86	5.44		4.68	1717
WGA-75M-020-H1	\$281.00	20:1	88	3	56C						759	79	3.14		2.48	1849
WGA-75M-020-H2	\$281.00	20:1	88	3	145TC						759	79	3.14		2.48	1849
WGA-75M-030-H1	\$281.00	30:1	58	2	56C						873	72	2.48		1.79	2026
WGA-75M-040-H1	\$281.00	40:1	44	1.5							957	68	1.88		1.28	1947
WGA-75M-060-H1	\$281.00	60:1	29	1							1099	62	1.26		0.78	1770
WGA-75M-080-H1	\$281.00	80:1	22	0.75							1205	58	0.97		0.56	1672
WGA-75M-100-H1	\$281.00	100:1	18	0.75							1289	52	0.80		0.42	1593

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.

2) Output Type: H = Hollow Bore.

3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.

5) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the "Service Factors" table for more information.

Gearbox Selection Factors

Overhung Load K Factors for Various Drive Types	
Chain & Sprocket	1.00
Gear	1.25
V-belt	1.50
Flat Belt	2.50
Variable Pitch Belt	3.50

Divide gearbox OHL ratings by the applicable OHL K factors.


Service Factors for Selecting Gearboxes (when used with electric motors)				
Service Continuity (per day)	Load Characteristics			
	Uniform	Moderate Shock*	Heavy Shock*	Extreme Shock*
Occasional 1/2 hour	1.00	1.00	1.00	1.25
Less than 3 hours	1.00	1.00	1.25	1.50
3-10 hours	1.00	1.25	1.50	1.75
More than 10 hours	1.25	1.50	1.75	2.00

* Shock results from sudden increases in the torque demand of the load, such as: sudden stopping, restarting, and/or reversing; significantly heavy loads dropped onto a moving conveyor; impact loads such as punch press operations.

Depending upon the load characteristics, divide the gearbox HP, Overhung Load, and Maximum Mechanical Capacity ratings by the applicable service factor.

IronHorse[®] Aluminum Worm Gearboxes

Gearbox Dimensions – Aluminum Worm Gearboxes

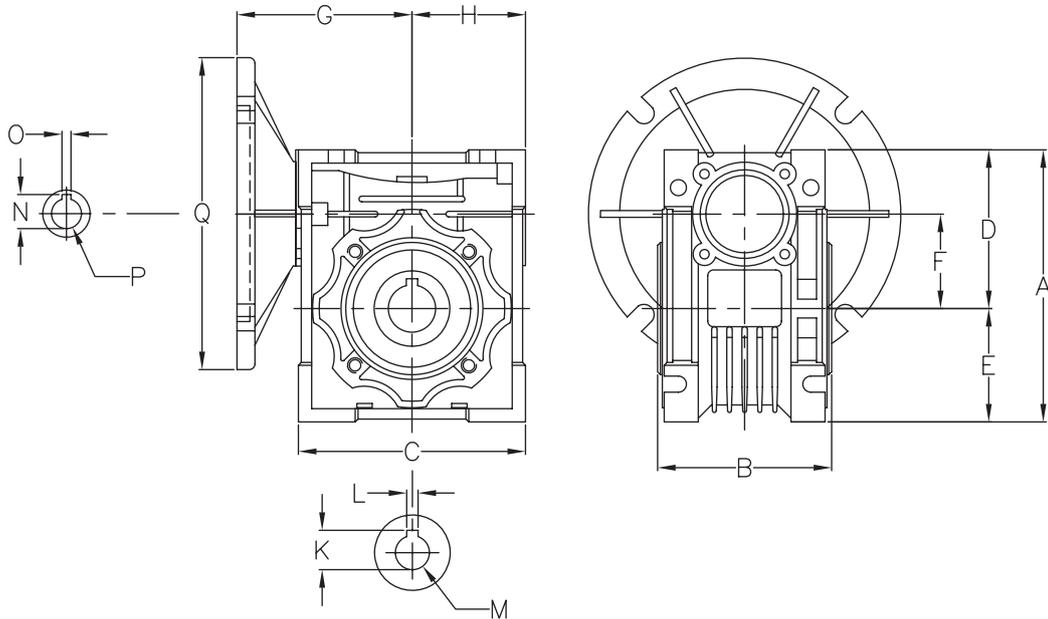

Dimensions (inches) – IronHorse Aluminum Worm Gearboxes																
Part Number	NEMA Motor Face	A	B	C	D	E	F	G	H	Output Bore			Input Shaft			ØQ
										K	L	ØM	N	O	ØP	
WGA-30M-xxx-H1	56C	3.82	2.48	3.15	2.24	1.57	1.18	2.89	1.57	0.720	0.20	0.625	0.73	0.19	0.625	6.50
WGA-40M-xxx-H1		4.78	3.07	3.94	2.81	1.97	1.57	3.18	1.97	0.840	0.20	0.750	0.71	0.19	0.625	6.50
WGA-50M-xxx-H1		5.67	3.62	4.72	3.31	2.36	1.97	3.58	2.36	1.110	0.24	1.000	0.71	0.19	0.625	6.50
WGA-63M-xxx-H1		6.87	4.42	5.69	4.00	2.87	2.48	4.06	2.84	1.250	0.31	1.125	0.71	0.19	0.625	6.50
WGA-63M-xxx-H2	145TC	6.87	4.42	5.69	4.00	2.87	2.48	4.06	2.84	1.250	0.31	1.125	0.97	0.19	0.875	6.50
WGA-75M-xxx-H1	56C	8.07	4.72	6.77	4.69	3.39	2.95	4.68	3.39	1.375	0.31	1.250	0.71	0.19	0.625	6.50
WGA-75M-xxx-H2	145TC	8.07	4.72	6.77	4.69	3.39	2.95	4.68	3.39	1.375	0.31	1.250	1.24	0.25	1.125	6.50
WGA-75M-xxx-H3	182/4TC	8.07	4.72	6.77	4.69	3.39	2.95	4.68	3.39	1.375	0.31	1.250	1.24	0.25	1.125	8.97

See our website: www.AutomationDirect.com for complete engineering drawings.

IronHorse[®] Aluminum Worm Gearboxes

Accessories – Aluminum Worm Gearboxes

IronHorse Aluminum Worm Gearbox Accessories			
Part Number	Price	Description	Typical Photo
WGA-30M-ACC1	\$7.75	Output flange, for aluminum WGA-30M series gearboxes. Includes (4) mounting screws.	
WGA-40M-ACC1	\$8.75	Output flange, for aluminum WGA-40M series gearboxes. Includes (4) mounting screws.	
WGA-50M-ACC1	\$9.75	Output flange, for aluminum WGA-50M series gearboxes. Includes (4) mounting screws.	
WGA-63M-ACC1	\$12.50	Output flange, for aluminum WGA-63M series gearboxes. Includes (8) mounting screws.	
WGA-75M-ACC1	\$20.25	Output flange, for aluminum WGA-75M series gearboxes. Includes (8) mounting screws.	
WGA-30M-ACC2	\$10.50	Torque arm, for aluminum WGA-30M series gearboxes. Includes (4) mounting screws.	
WGA-40M-ACC2	\$11.50	Torque arm, for aluminum WGA-40M series gearboxes. Includes (4) mounting screws.	
WGA-50M-ACC2	\$12.50	Torque arm, for aluminum WGA-50M series gearboxes. Includes (4) mounting screws.	
WGA-63M-ACC2	\$20.75	Torque arm, for aluminum WGA-63M series gearboxes. Includes (8) mounting screws.	
WGA-75M-ACC2	\$33.75	Torque arm, for aluminum WGA-75M series gearboxes. Includes (8) mounting screws.	
WGA-30M-ACC3	\$10.50	Single output shaft, Ø0.625 in, for aluminum WGA-30M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-40M-ACC3	\$12.00	Single output shaft, Ø0.75 in, for aluminum WGA-40M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-50M-ACC3	\$14.25	Single output shaft, Ø1.0 in, for aluminum WGA-50M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-63M-ACC3	\$19.00	Single output shaft, Ø1.125 in, for aluminum WGA-63M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-75M-ACC3	\$24.50	Single output shaft, Ø1.25 in, for aluminum WGA-75M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-30M-ACC4	\$13.75	Double output shaft, Ø0.625 in, for aluminum WGA-30M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-40M-ACC4	\$16.50	Double output shaft, Ø0.75 in, for aluminum WGA-40M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-50M-ACC4	\$19.00	Double output shaft, Ø1.0 in, for aluminum WGA-50M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-63M-ACC4	\$25.75	Double output shaft, Ø1.125 in, for aluminum WGA-63M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-75M-ACC4	\$31.75	Double output shaft, Ø1.25 in, for aluminum WGA-75M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-30M-ACC5	\$4.50	Output cover, for aluminum WGA-30M series gearboxes. Includes (4) mounting screws.	
WGA-40M-ACC5	\$4.50	Output cover, for aluminum WGA-40M series gearboxes. Includes (4) mounting screws.	
WGA-50M-ACC5	\$7.75	Output cover, for aluminum WGA-50M series gearboxes. Includes (4) mounting screws.	
WGA-63M-ACC5	\$7.75	Output cover, for aluminum WGA-63M series gearboxes. Includes (4) mounting screws.	
WGA-75M-ACC5	\$7.75	Output cover, for aluminum WGA-75M series gearboxes. Includes (4) mounting screws.	

Company Information

Drives

Soft Starters

Motors

Power Transmission

Motion: Servos and Steppers

Motor Controls

Sensors: Proximity

Sensors: Photoelectric

Sensors: Encoders

Sensors: Limit Switches

Sensors: Current

Sensors: Pressure

Sensors: Temperature

Sensors: Level

Sensors: Flow Switches

Pushbuttons and Lights

Stacklights

Signal Devices

Process

Relays and Timers

Pneumatics: Air Prep

Pneumatics: Directional Control Valves

Pneumatics: Cylinders

Pneumatics: Tubing

Pneumatics: Air Fittings

Appendix Book 2

Terms and Conditions

IronHorse® Worm Gearboxes

Gearbox Selection

Gearbox Selection Steps

- 1) Determine the torque and speed required for the load.
- 2) Determine the overall speed ratio of motor speed to load speed.
- 3) Determine the gearbox ratio as well as any reduction outside the gearbox (pulleys, gears, etc.).
- 4) Determine the applicable service factor and overhung load K factor.
- 5) Determine the gearbox real output torque required, and select a gearbox with a higher Maximum Thermal output Torque rating (for WG cast-iron gearboxes; not applicable for WGA aluminum gearboxes).
- 6) Determine the gearbox design output torque required (torque with service factor applied), and select a gearbox with a higher Maximum Mechanical Output Torque rating. (Gearbox must also meet requirement #5.)
- 7) Determine the required sizes of pulleys, gears, etc., and determine the overhung load force. Select a gearbox with a higher Overhung Load rating. (Gearbox must also meet requirements #5 & #6.)
- 8) Confirm that the selected gearbox meets the applicable system requirements.
- 9) Select a compatible motor.

Gearbox Selection Example

(Refer to the specifications tables for gearbox specifications, service factors, and K factors.)

A conveyor will run 10 hours/day with moderate shock loading. The conveyor will be driven by a V-belt and needs to be driven at approximately 20 rpm. The motor to be used will have a nominal speed of 1800 rpm (1725 rpm actual speed). The conveyor will require 2700 in-lb of torque.

- 1) Required **torque** = 2700 in-lb; required **speed** = 20 rpm.
- 2) Determine the **overall speed ratio** of motor speed to load speed:
Overall speed ratio = motor speed / load speed = 1725 / 20 = 86.25 [about 86:1]
- 3) Determine **pulley ratios** at available **gearbox ratios**:
Gearbox ratio = (overall speed ratio) / (pulley ratio)
Pulley ratio = (overall speed ratio) / (gearbox ratio)

For 5:1 gearbox:	pulley ratio = 86.25 / 5 = 17.25 [17.25" pulley size is prohibitively large]	
For 10:1 gearbox:	pulley ratio = 86.25 / 10 = 8.63	
For 15:1 gearbox:	pulley ratio = 86.25 / 15 = 5.75	
For 20:1 gearbox:	pulley ratio = 86.25 / 20 = 4.31	
For 30:1 gearbox:	pulley ratio = 86.25 / 30 = 2.88	
For 40:1 gearbox:	pulley ratio = 86.25 / 40 = 2.16	
For 60:1 gearbox:	pulley ratio = 86.25 / 60 = 1.44	

Pulley ratio = (conveyor pulley diameter) / (gearbox pulley diameter)
- 4) Determine **service factor (SF)** and **overhung load factor (K)** from applicable tables:
SF = 1.25 due to moderate shock loading and 3-10 hours/day operation
K = 1.5 due to V-belt
- 5) Use specifications table to select gearbox with **Maximum Thermal* Torque rating > required real torque**:
Gearbox required real torque = (final torque) / (pulley ratio)

For 10:1 gearbox:	(2700 in-lb) / 8.63 = 312.86 in-lb;	use WG-175-x or larger
For 15:1 gearbox:	(2700 in-lb) / 5.75 = 469.57 in-lb;	use WG-175-x or larger
For 20:1 gearbox:	(2700 in-lb) / 4.31 = 626.45 in-lb;	use WG-206-x or larger
For 30:1 gearbox:	(2700 in-lb) / 2.88 = 937.50 in-lb;	use WGA-63M* or larger
For 40:1 gearbox:	(2700 in-lb) / 2.16 = 1250.0 in-lb;	none applicable
For 60:1 gearbox:	(2700 in-lb) / 1.44 = 1875.0 in-lb;	none applicable

(continued on next page)

IronHorse® Worm Gearboxes

Gearbox Selection Example (continued)

(Refer to the specifications tables for gearbox specifications, service factors, and K factors.)

[Load requirements: Conveyor to run 10 hours/day; moderate shock loading; driven by V-belt @ approx 20 rpm; requires 2700 in·lb of torque. Motor speed 1725 rpm (1800 rpm nominal).]

6) Use specifications table to select gearbox with **Maximum Mechanical Torque rating > required design torque**:

Gearbox required design torque = (real gearbox torque)(service factor)

For 10:1 gearbox: $(312.86 \text{ in·lb})(1.25) = 391.08 \text{ in·lb}$; use WG-175-x or larger

For 15:1 gearbox: $(469.57 \text{ in·lb})(1.25) = 586.96 \text{ in·lb}$; use WG-206-x or larger

For 20:1 gearbox: $(646.45 \text{ in·lb})(1.25) = 808.06 \text{ in·lb}$; use WG-206-x or larger

For 30:1 gearbox: $(937.50 \text{ in·lb})(1.25) = 1178.88 \text{ in·lb}$; use WGA-63M or larger

7) Use the gearbox overhung load ratings from the specifications table to determine the minimum allowable pulley diameters. Select gearbox with **Overhung Load rating > overhung load force**:

Gearbox required OHL rating = (gearbox real torque)(K)(SF)/(gearbox pulley diameter / 2)

Minimum gearbox pulley diameter = (T)(K)(SF)(2)/(OHL rating)

Conveyor pulley diameter = (gearbox pulley diameter)(pulley ratio)

For 10:1, WG-175-010-x gearbox:

Minimum gearbox pulley diameter = $(312.86 \text{ in·lb})(1.5)(1.25)(2)/(650 \text{ lb}) = 1.8''$ [use 2'']

Conveyor pulley diameter = $(2'')(8.63) = 17.26''$ [17.26'' pulley size is prohibitively large]

Determine pulley sizes and OHL for next larger gearbox ratio.

For 15:1, WG-206-015-x gearbox:

Minimum gearbox pulley diameter = $(469.57 \text{ in·lb})(1.5)(1.25)(2)/(700 \text{ lb}) = 2.5''$ [use 2.5'']

Conveyor pulley diameter = $(2.5'')(5.75) = 14.38''$ [use 14.4'']

Select **WG-206-015-x gearbox, 2.5'' gearbox pulley, and 14.4'' conveyor pulley.**

For 20:1, WG-206-020-x gearbox:

N/A – larger ratio of same frame size GB is same price, yet provides lower efficiency and power characteristics

For 30:1, WGA-63M-030-H1 gearbox:

Minimum gearbox pulley diameter = $(937.50 \text{ in·lb})(1.5)(1.25)(2)/(736 \text{ lb}) = 4.78''$ [use 5'']

Conveyor pulley diameter = $(5'')(2.88) = 14.40''$ [use 14.4'']

N/A – WGA-63M gearbox costs more than WG-206

8) **Check results** against original speed and torque requirements:

a) Conveyor speed = (motor speed) / (gearbox ratio)(pulley ratio) = $(1725 \text{ rpm}) / (15)(14.4''/2.5'') = 20 \text{ rpm}$

b) Maximum real torque available at conveyor = (gearbox thermal torque)(pulley ratio) = $(673 \text{ in·lb})(14.4''/2.5'') = 3876 \text{ in·lb}$

c) Maximum design torque available at conveyor = (gearbox mechanical torque)(pulley ratio) / (service factor)
= $(1002 \text{ in·lb})(14.4''/2.5'') / 1.25 = 4617 \text{ in·lb}$

The speed is correct as required, and both maximum torque values are greater than the 2700 in·lb required by the load.

9) **Select a motor** and check torque transmitted to the load:

From the gearbox spec tables, WG-206-015-x efficiency = 85%.

maximum thermal input power = 1.40 hp

maximum mechanical input power @ 1.0 SF = 2.09 hp

maximum mechanical input power @ 1.25 SF = (rated max mechanical input power) / (SF) = $2.09 \text{ hp} / 1.25 = 1.67 \text{ hp}$

maximum allowable motor power = 1.40 hp; select nominal 1hp motor

Select **1hp motor**, and check for adequate torque at the load:

Torque = Power / Speed [conversion factor: (1hp) = (63,025 in·lb·rpm)]

Torque_{load} = $(63,025 \text{ in·lb·rpm} / \text{hp})(\text{gearbox input hp})(\text{gearbox efficiency}) / (\text{motor rpm} / (\text{gearbox ratio})(\text{pulley ratio}))$

= $(63,025)(1)(0.85) / (1725 / (15/1)(14.4/2.5)) = 2683 \text{ in·lb}$ [insufficient torque at load]

This torque value is less than the 2700 in·lb required by the load.

So, select and check the next larger nominal motor size, which is 1-1/2 hp.

Since the 206 frame size 15 ratio gearboxes do not meet the 1-1/2 hp thermal rating, choose the WG-237-015-x gearbox.

Select **1-1/2 hp motor** and **WG-237-015-x gearbox**, and check for adequate torque:

WG-237-015-x gearbox efficiency = 84%

maximum thermal input power = 1.55 hp

maximum mechanical input power @ 1.25 SF = $2.64 \text{ hp} / 1.25 = 2.11 \text{ hp}$

maximum allowable motor power = 1.55 hp; select nominal 1-1/2 hp motor

gearbox ratio is still 15:1, and OHL rating is increased to 900 lb, so the previous pulley calculations [step 7] remain sufficient

[smaller pulleys can be calculated and selected for this gearbox, if desired]

T_{load} = $(63,025 \text{ in·lb·rpm} / \text{hp})(1.5 \text{ hp})(84\%) / (1725 \text{ rpm} / (15/1)(14.4/2.5)) = 3977 \text{ in·lb} > 2700 \text{ in·lb}$; sufficient torque at load

Final gearbox and motor selection: 1-1/2 hp motor WG-237-015-x gearbox