



Linear Transducers



Programmable Counters



Wire Transducers





Incremental Encoders



Single and Multi-Axis Positioners

# SINGLE & MULTI-AXIS PLC CONTROLLERS

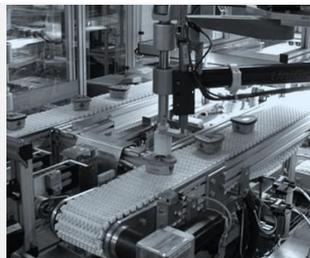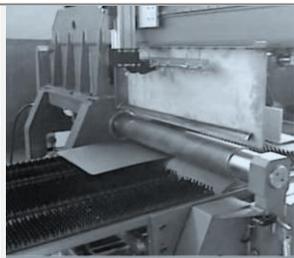



# elap NEXUS N2

## MULTIFUNCTIONAL CONTROLLER With Embedded PLC

- Control over 2/4 digital axes
- Embedded PLC, Ladder or Instruction List programming
- Configurable user interface
- Programming through the mini USB 2.0 port
- Real Time Clock
- FLASH memory for data backup
- Main bus for I/O expansion
- Modbus RTU communication protocol over 2 ports
- Removable SD card support for data, recipes and program backup/upload

**NEXUS N2** controls two/four digital axes by its 12-bit analogue output. Its powerful embedded PLC can be programmed both in Ladder and in Instruction List language. **NEXUS N2** user interface can be completely configured according to the application requirements. The user interface and PLC program graphical pages are stored into the wide Flash Memory area in the microprocessor.

**NEXUS N2** can be programmed over the mini USB port, allowing for high speed in the communication, an important feature for programmers when developing projects.

Modbus RTU communication protocol is available on both communication ports, thus allowing **NEXUS N2** to operate as Master over COM1 RS485 port, and as Slave over COM2 RS232 port at the same time.

By means of the SD card it is possible to upload and save recipes, or working and axes data, and to manage the upgrades of application software.

The Real Time Clock with date keeping is accessible through PLC instructions and it allows to handle scheduled activities, such as programmed maintenance operations, productivity control and so on.

**NEXUS BOX N2**, the inside-board mounting version, can be profitably coupled to a touch-screen HMI terminal.

### HARDWARE

- CPU 32 bit RISC
- Flash Memory 512 kB
- Memory for PLC programming: 64 kB Flash
- Memory for graphical pages: 192 kB in memoria Flash
- RAM for PLC data: 8 kB
- RAM for recipes: 1MB

### USER INTERFACE


- Polyester 41-key-KEYBOARD each key having programmable functions, i.e.:
  - 8 keys in the display area
  - 10 function keys with custom label possibility
  - 8 navigation keys
  - 1 key for reset function or alarm display
- Numerical pad
- START and STOP push-buttons with LEDs
- 25 programmable signalling LEDs
- Rear-lighted GRAPHICAL DISPLAY 240 x 128 pixel
  - 128 expandable text pages
  - 25 graphical bit-map backgrounds 240x128 pixel
  - 256 messages, each by 30 bytes
  - Storable data structures with indexed access (recipes)

### INTERFACE TO THE FIELD

- DIGITAL INPUTS: 32 optoisolated inputs + 4 inputs devoted for interrupt command
- DIGITAL OUTPUTS: 32 50 mA optoisolated inputs
- I/O EXPANSION MODULES: 16 inputs + 16 outputs 500 mA – Fixing on DIN bar
- INCREMENTAL ENCODERS: 2 bidirectional count inputs, 5V Line Driver (RS422), with zero reference reading, 500 KHz frequency
- AXIS COMMAND: 2/4 differential analogue outputs  $\pm 10V_{cc}$  - 12 bit - Optional: 10 V analogue outputs
- Possibility to handle axes ON/OFF
- ANALOGUE INPUTS: 2/4 analogue inputs 0÷5 V- 10 bits – Optional: 10 V analogue inputs, common type
- ALARMS: 1 contact for system watch-dog
- COMMUNICATION: 2 RS232 serial ports, or 1 serial port RS232 + 1 serial port RS485



## DIMENSIONS

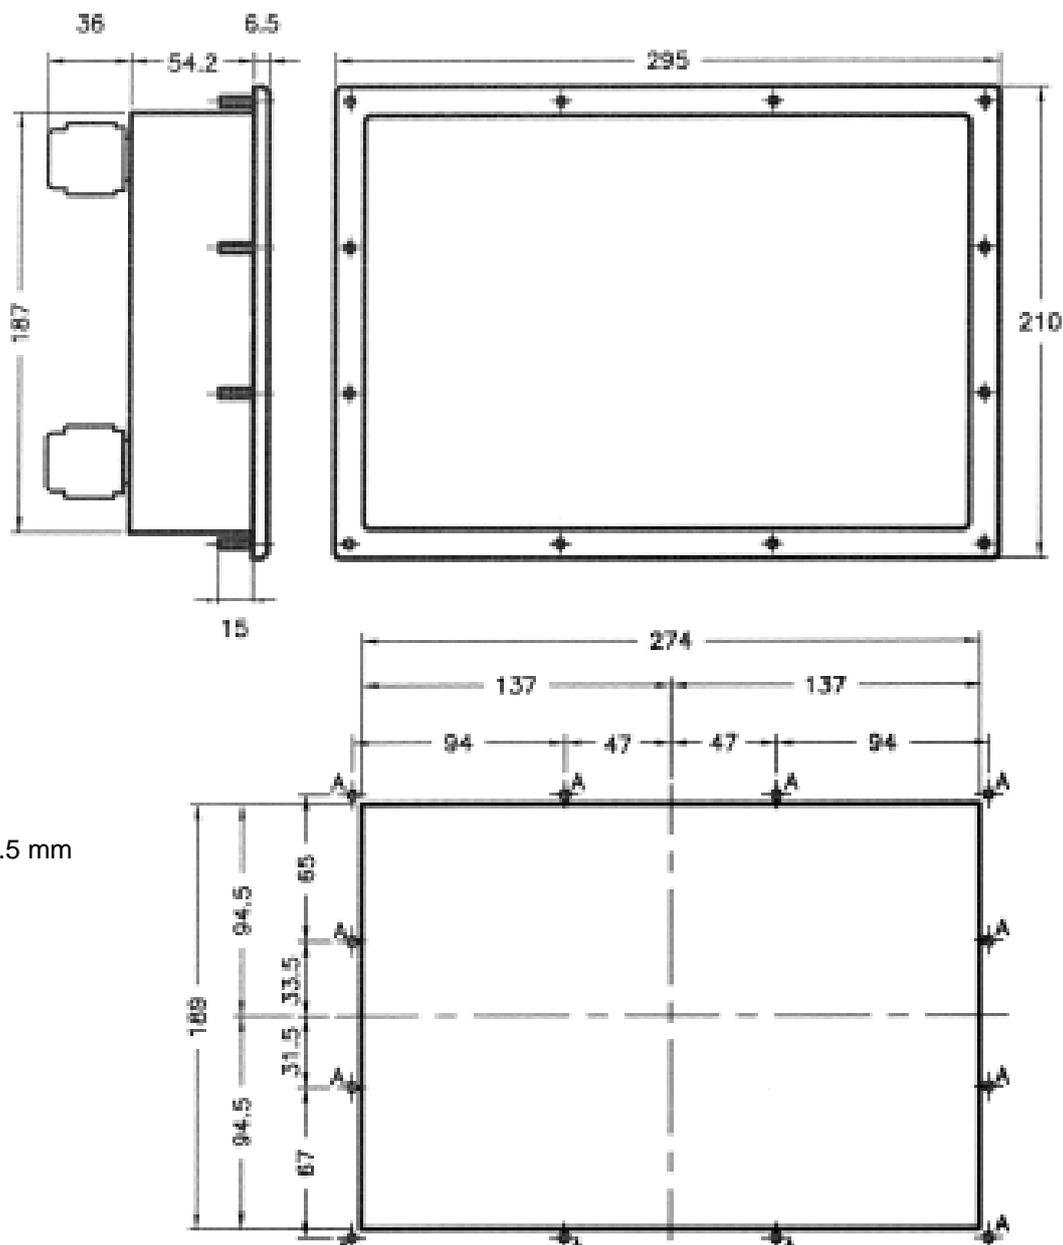

Panel cut off  
A = Holes Ø 4.5 mm

## GENERAL SPECIFICATIONS

- Front protection degree: IP65
- Supply: 24 Vdc  $\pm 15\%$  30 Watt max.
- Connections:  
Extractable terminal box: supply, digital I/O  
Canon connectors: encoder, analogue I/O, serial ports
- On request: digital outputs on relay modules
- Lithium battery 5 years life
- 

## ORDERING INFORMATION

Type	Axes No.	Input/Ouptut connections	Memory	Serial line
<b>Nexus N2</b>	2 = 2 axes	<b>32 + 32 I/O</b>	<b>128 kB RAM</b>	2 RS232 serial ports
<b>Nexus Box N2</b>	4 = 4 axes	- terminal box connections - external relays connections		1 RS232 + 1 RS485 serial ports
<i>Optional:</i>				
- 4 analogue inputs				
- SSI serial interface				

**elap**

ELAP AUTOMAZIONE INDUSTRIALE VIA VITTORIO VENETO, 4 – I-20094 CORSICO (MI)  
TEL. ++39.02.4519561 FAX ++39.02.45103406 E-MAIL: INFO@ELAP.IT WWW.ELAP.IT



# elap VEGA+

## MULTIFUNCTIONAL CONTROLLER with embedded PLC

*Touch screen*

- Control over one or two digital axes
- Embedded PLC, Ladder or Instruction List programming
- Touch screen
- Graphical pages handled
- Interface completely programmable via PC
- Proprietary fieldbus for I/O expansion
- Compatible with VEGA
- Modbus RTU communication protocol

New graphical design and a **powerful man-machine interface** are the main features of the **controller VEGA+**. The wide **TFT color display** is rear-lighted. Its **touch screen** functions are easily set by means of a dedicated program. **VEGA+** controls one or two digital axes with 12 bit analogue output; its mighty **embedded PLC** can be programmed both in Ladder and in Mnemonic language.

**VEGA+** hardware specifications are consistent with VEGA prior version, while its software was enhanced to handle the touch screen functionalities.

VEGA PLC programs and tasks are compatible with VEGA+ applications.

### HARDWARE

- **CPU** 32 bit RISC 65 MIPS
- **Flash memory** 256 Kbyte
- **RAM** for user programs, data and pages: 512 Kbyte - optional 128 Kbyte NV RAM

### USER INTERFACE


- **Polyester 33-key-KEYBOARD**, each key having programmable functions, i.e.:
  - 4 keys in the display area
  - 9 function keys with signalling LEDs
  - 4 direction keys
  - 1 key for the reset function or alarm display
- Numerical pad
- START and STOP push-buttons with LEDs
- **TFT COLOR DISPLAY** Touch Screen 432 x 240 pixel, 4.2 inch, 65000 colours
- 64 expandable text pages
- 256 messages, each by 20 bytes
- Storable data structures with indexed access (recipes)
- Texts handled in four languages
- Images by 128x128 pixel for icons and animation
- Graphical touch screen push-buttons

### INTERFACE TO THE FIELD

- **DIGITAL INPUTS:** 16 optoisolated inputs + 2 devoted to the interrupt command
- **DIGITAL OUTPUTS:** 16 50 mA optoisolated outputs I max 50 mA
- **INCREMENTAL ENCODERS:** 2 5V- Line Driver (RS422) bidirectional count inputs with zero reference reading, 500 KHz frequency
- **AXIS COMMAND:** 2 12-bit  $\pm 10$ Vdc differential analogue outputs. Possibility to command ON/OFF axes
- **ANALOGUE INPUTS:** 4 0-5 V analogue inputs with 10 bit resolution - Optional: 10 V analogue outputs
- **ALARMS:** 1 contact for system watch-dog
- **COMMUNICATION:** 2 RS232 serial ports or 1 RS232 + 1 RS485 serial port – optional 1 USB port
- **EXPANSION MODULES:** 16 inputs + 16 outputs 500 mA
- DIN bar fixing
- **Modbus RTU** communication protocol in master or slave mode



## DIMENSIONS

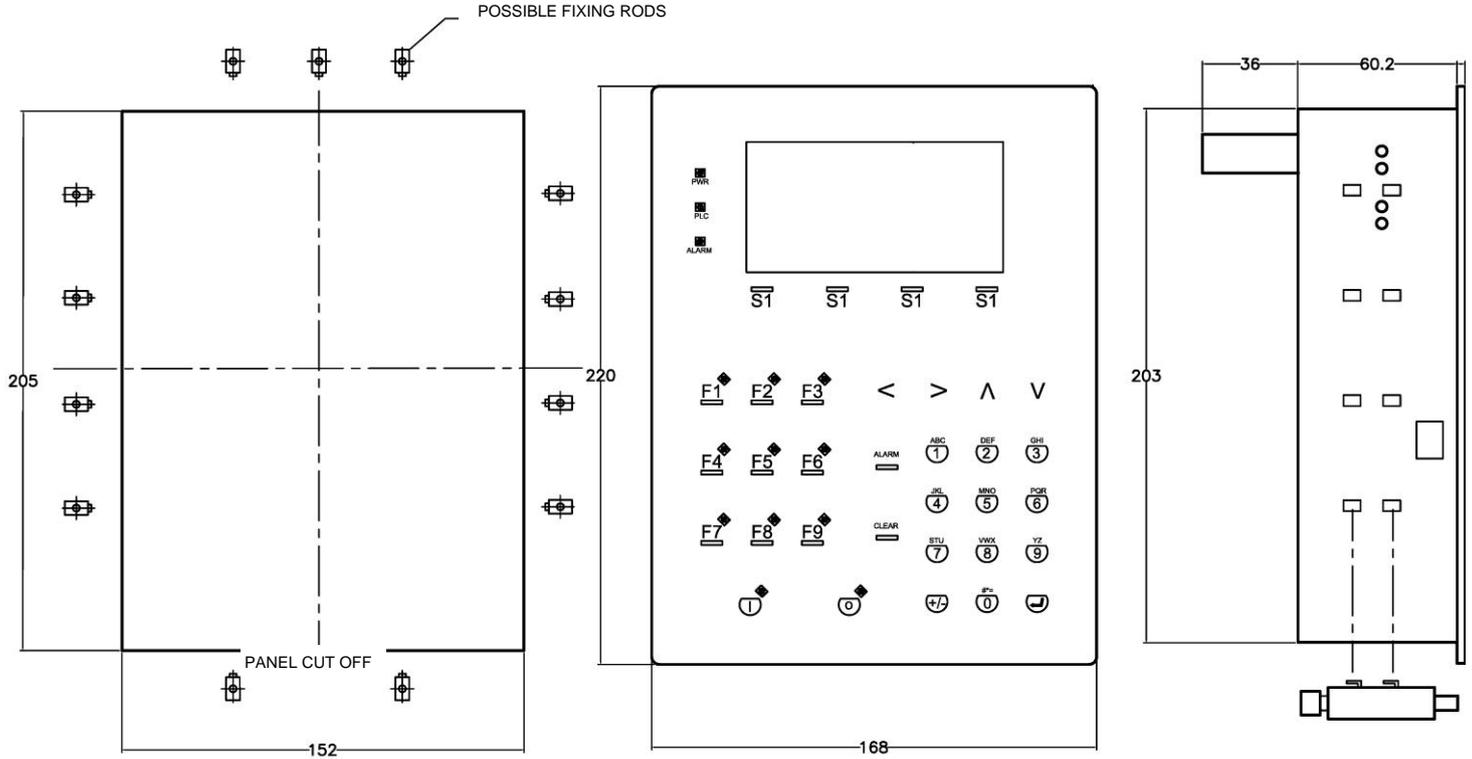


## GENERAL SPECIFICATIONS

- Front protection degree: IP65
- Supply: 24 Vdc  $\pm 15\%$  24 Watt max.
- Connections:
- Extractable terminal box: supply, digital I/O
- Canon connectors: encoder, analogue I/O, serial ports
- On request: digital outputs on relay modules
- Lithium battery 5 years life (Except type with NV RAM)

## ORDERING INFORMATION

VEGA+	1 axis	M	512K RAM	R
<b>Type</b> VEGA+	<b>Controlled Axes</b> 1 axis 2 axes	<b>Input/Outputs Connections</b> M = 16 + 16 I/O terminal box connections R = 16 + 16 I/O on external relay modues	<b>RAM Capacity</b> 512 KB RAM 128 KB NV RAM	<b>Serial Ports</b> R = 2 RS232 serial ports S = 1 RS232 + 1 RS485 serial ports T = 1 RS232 + 1 RS422 serial ports U = 2 RS232 serial ports + 1 USB V = 1 RS232 + 1 RS485 serial ports + 1 USB Z = 1 RS232 + 1 RS422 serial ports + 1 USB



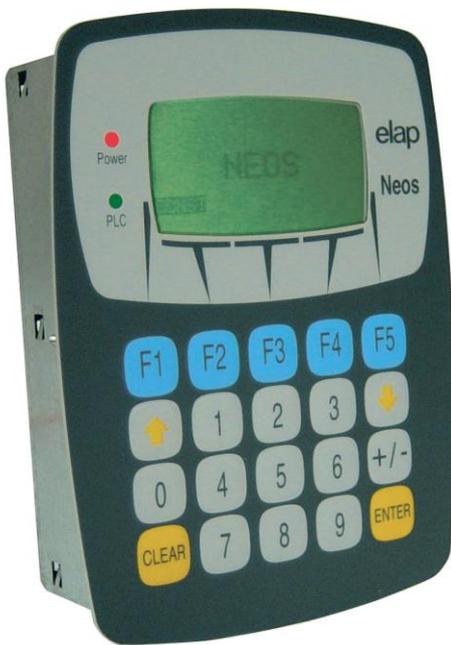

# elap NEOS N1

## SINGLE AXIS CONTROLLER with embedded PLC

- *Control over 1 axis*
- *embedded PLC, LADDER or Mnemonic programming*
- *Programmable user interface*
- *Graphical pages handled*
- *Application programs available*

Small-sized and compact-shaped **NEOS N1** features a *single axis controller* with great potential.

Its embedded PLC allows to configurate several functional options, tailoring NEOS for any application in the *counting and positioning field* as well as for the *development of simple logic circuits*.

The Integrated Development Environment Elap CmStudio allows to create the PLC program and to configurate the user graphical interface.

### HARDWARE

- **CPU** 8 bit 4 MIPS
- **Flash memory** 32 Kbyte
- **RAM/Flash memory** for user programs, pages and data: 3.6 Kbyte for the PLC + 32 Kbyte for pages and recipes

### USER INTERFACE


- Polyester **KEYBOARD** with 20 keys, 9 with programmable functions, i.e.:
  - 5 keys in the display area and/or function keys
  - 2 navigation keys
  - 1 reset or alarm display key
  - numerical pad
- **LCD GRAPHIC LED DISPLAY**, rear-lighted 128x64 pixel
  - expansible text pages
  - messages
  - storable data structures with indexed access (recipes)
  - images up to 16x16 pixel for icons and animation

### INTERFACE TO THE FIELD

- **DIGITAL INPUTS:** 6 optoisolated inputs
- **DIGITAL OUTPUTS:** 4 500-mAmp optoisolated outputs  
2 1-Amp solid state NPN outputs
- **INCREMENTAL ENCODERS:** 5 Vdc Line driver (RS422) bidirectional count input with zero reference reading, frequency 400 KHz  
Optional: 5 or 12 Vdc push-pull/NPN open collector, 12 Vdc line driver
- **AXIS COMMAND:** 1  $\pm 10$ Vdc differential analog output 12 bit resolution. ON/OFF axes control possible
- **COMMUNICATION:** 1 serial port RS232 or RS485
- **VERSION SA:** 1 potentiometer input + 3 PNP inputs



## DIMENSIONS

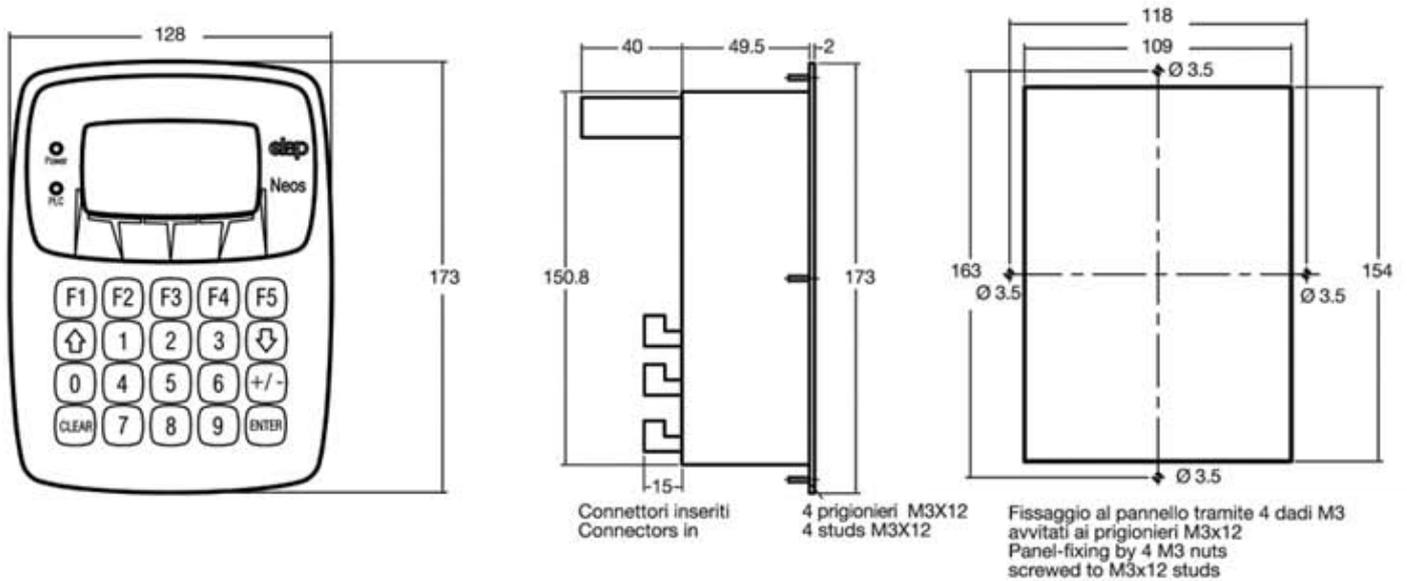

## GENERAL SPECIFICATIONS

- Supply 24Vdc $\pm$ 15% 10 Watt max./19,5Vac  $\pm$ 10% 10VA
- Frontal protection degree: IP65
- Connections:
  - extractible terminal box: supply, digital I/O
  - Canon connector: encoder, I/O analogici, porta seriale serial port
- Data memory on Flash EEPROM

## ORDERING INFORMATION

<b>NEOS N1</b>	<b>1 axis</b>	<b>6+6 I/O</b>	<b>5 Vdc LD</b>	<b>R</b>
				<u>Serial line</u> R = 1 serial port RS232 S = 1 serial port RS485
				<u>Count input</u> 5 Vdc line driver/push pull/open collector 12 Vdc line driver/ push pull/open collector
				<u>Inputs/outputs</u> 6 + 6 I/O PNP 3i+6o PNP (version SA)
				<u>Axes number</u> 1 = axis
<u>Type</u> NEOS N1				





## PLC CONTROLLERS NEXUS N2 BOX VEGA BOX



The PLC controllers series **NEXUS** and **VEGA** can be supplied in the **BOX version for inside board mounting**. **NEXUS BOX N2** and **VEGA BOX** can be employed together with operator terminals to develop complex controlling systems.

### NEXUS BOX N2 2/4 axes controller



- **INSIDE BOARD VERSION**
- Fixing plate dimensions mm 300x190
- **2 to 4 digital axes managed** by means of  $\pm 10\text{Vdc}$  ( $0 \div \pm 5\text{ Vdc}$ ) digital outputs with 12 bit resolution
- CPU 32 bit RISC • Input signals: 5 Vdc line driver
- **PLC • IDE CMStudio for PLC programmng (ladder or IL).**
- Supply voltage: 24 Vdc  $\pm 15\%$  36 Watt • Connections on terminal box or on external relay modules
- **Modbus RTU communication protocol • Master RS485 + Slave RS232 option**
- **PLC program saved on EEprom**
- **PLC program memory 64 kB • Programming via USB 2.0 mini port • Real Time Clock**
- **Flash memory 1 MB for the backup or the RAM data • SD card slot max. 2 GB for data backup/upload, receipt and programs– SD card included**
- OPTIONAL:** • 4 0-5V analogue input s • 4 10V analogue inputs •  $0 \div \pm 10\text{ Vdc}$  analogue outputs



### VEGA BOX 1/2 axes controller

- **INSIDE BOARD VERSION**
- Fixing plate dimensions mm 233 x 154
- CPU 32 bit RISC 65 MIPS
- **1 or 2 digital axes managed by  $\pm 10\text{Vcc}$  ( $0 \div \pm 5\text{ Vdc}$ ) differential analogue outputs, 12 bit resolution**
- Input signals: r 5 Vdc line driver
- **PLC • IDE CMStudio for PLC programmng (ladder or IL).**
- Dimensions: mm 158x210x60
- Supply voltage: 24 Vdc  $\pm 15\%$  24 Watt max.
- Connections on terminal box or on external relay modules
- **Modbus RTU communication protocol**
- OPTIONAL:** • 4 0-5V analogue input s • 4 10V analogue inputs •  $0 \div \pm 10\text{ Vdc}$  analogue outputs

